

FLAT LAY-IN EXPOSED GRID CEILING ACCESS PANEL CD/FLB

Flat Lay-In
Exposed Grid Ceiling
Access Panel



Tile to be supplied and fitted by installer, it is shown here for illustration purposes only.

Our exposed grid access hatch fits within exposed grid ceilings which accommodate easily installed tiles to blend in with the modular aesthetics seamlessly and still allow easy access to the ceiling cavity behind.

It features our unique all-in-one door and frame design that allows for both tegular and flat lay-in configurations. That way just one product can be used to match the aesthetic of both ceilings.



Exposed Grid Design
Access panel for seamless design



2-in-1 Flexible Door
Single door and frame for tegular and lay-in



Maximum Protection
Full Polyester Powder Coating

Composition

- Frame** ▶ 1mm zintec welded construction
- Door** ▶ 1mm zintec folded all sides for rigid door shell
- Coating** ▶ Full Polyester Powder Coated RAL9010 White as standard
- Locks** ▶ Budget Lock as standard

Installer must follow guidelines set by the wall or ceiling manufacturer to ensure the correct properties are achieved for the environment. All testing has been conducted by independent UKAS accredited testing centres, further details available upon request.


FLAT LAY-IN EXPOSED GRID CEILING ACCESS PANEL CD/FLB

Access Panel in Flat Lay-In Exposed Grid Ceiling System

Fitting Guidelines

To calculate a sufficient opening for the frame, we recommend adding 10mm to the door size supplied. Alternatively when ordering an access panel or hatch to suit an opening, take away 10mm from your opening dimension to calculate a door size.

Frame should be screw fixed into the ceiling opening using fixing holes located on all four sides of the framework. It is recommended that sufficient independent bracing and support is obtained to ensure safe opening and closing of the access hatch within it's environment.

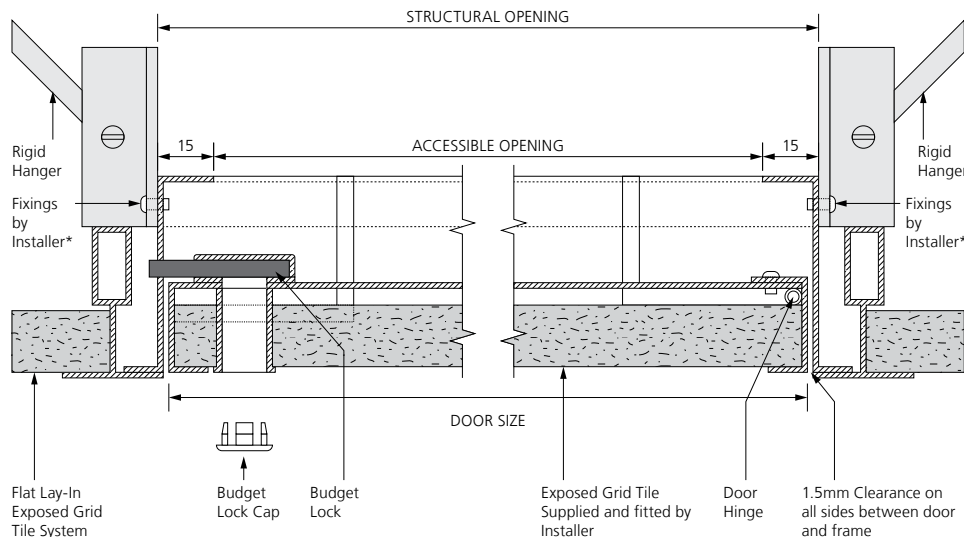

LEGEND:  Plaster skim
 Plasterboard

PLEASE NOTE: Drawing is not to scale, use for reference purposes only. Components shown with an asterisk (*) are suggestions only. Always refer to installation guidance provided by your ceiling manufacturer.

Standard Shape and Sizes

Below is our range of sizes we manufacture as standard.

| Grid | Door Type | Door Size (mm) | Accessible Opening (mm) |
|------|-----------|----------------|-------------------------|
| 24mm | Single | 575 x 575 | 572 x 532 |
| | Single | 1175 x 575 | 1172 x 532 |
| | Double | 1175 x 1175 | 1172 x 1092 |
| 15mm | Single | 585 x 585 | 582 x 542 |
| | Single | 1185 x 585 | 1182 x 542 |
| | Double | 1185 x 1185 | 1182 x 1102 |

Extra Protection Against Moisture and Corrosion

Ceildoor metal access panels are powder-coated white RAL9010 full polyester paint. Even though the majority of access hatches are used internally, we use full polyester powder coating which is recommended for general exterior situations, where good weathering resistance is required against high levels of atmospheric moisture or in particularly aggressive atmospheres.

Security and Safety

It is extremely important to close and lock the access panel or hatch immediately after use. Failure to do so will affect and impair the performance of the environment where it has been installed in the event of fire.